

**ViewSonic**  PROJECTOR  
**PA503W**

**Key Features**


HIGHER BRIGHTNESS. LONGER LAMP LIFE.

- 22,000:1 contrast ratio
- SuperColor™ technology
- 5 color modes
- Auto power off
- Vertical keystone



**Product Description**

The ViewSonic PA503W offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503W projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColor™ technology offers a wider range of displayable color ensuring true-to-life colors in both bright and dark environments without sacrificing image quality.

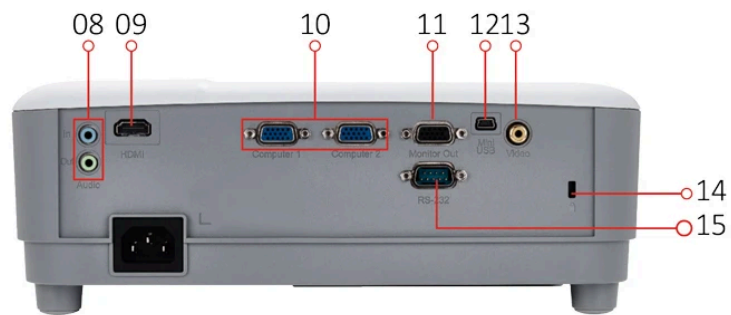

- |                  |                 |           |
|------------------|-----------------|-----------|
| 1. Keypad        | 8. Audio in/out | 15. RS232 |
| 2. LED indicator | 9. HDMI         |           |
| 3. Lamp cover    | 10. Dual VGA    |           |
| 4. Security lock | 11. VGA out     |           |

5. Zoom/Focus  
6. Front IR  
7. Projection Lens

12. Mini USB  
13. Video  
14. Kensington® Lock Slot

---

**Visit Us**

[www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

|   |  |
|---|--|
| Projection System:                            | 0.65" WXGA                                 |
| Native Resolution:                            | 1280x800                                   |
| Brightness:                                   | 4000 (ANSI Lumens)                         |
| Contrast Ratio with SuperEco Mode:            | 22000:1                                    |
| Display Color:                                | 1.07 Billion Colors                        |
| Light Source Type:                            | 200W UHP Lamp                              |
| Light Source Life (hours) with Normal Mode:   | 6000                                       |
| Light Source Life (hours) with SuperEco Mode: | 15000                                      |
| Lens:   | F=2.56-2.68, f=22-24.1mm                   |
| Projection Offset:                            | 100% +/-5%                                 |
| Throw Ratio:                                  | 1.55-1.70                                  |
| Optical Zoom:                                 | 1.1x                                       |
| Digital Zoom:                                 | 0.8x-2.0x                                  |
| Image Size:                                   | 30"-300"                                   |
| Throw Distance:                               | 1m-10.98m<br>(100"@3.34m)                  |
| Keystone:                                     | +/- 40° (V)                                |
| Audible Noise (Normal):                       | 31dB                                       |
| Audible Noise (Eco):                          | 27dB                                       |
| Input Lag:                                    | 16ms                                       |
| Resolution Support:                           | VGA(640 x 480) to FullHD(1920 x 1080)      |
| HDTV Compatibility:                           | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility:                          | NTSC, PAL, SECAM                           |
| Horizontal Frequency:                         | 15K-102KHz                                 |
| Vertical Scan Rate:                           | 23-120Hz                                   |
| <b>INPUT</b>                                  |  |
| Computer in (share with component):           | 2  |
| Composite:                                    | 1  |
| HDMI:   | 1<br>(HDMI 1.4/ HDCP 1.4)                  |
| Audio-in (3.5mm):                             | 1  |
| <b>OUTPUT</b>                                 |  |
| Monitor out:                                  | 1  |
| Audio-out (3.5mm):                            | 1  |
| Speaker:                                      | 2W   |
| <b>CONTROL</b>                                |  |
| RS232 (DB 9-pin male):                        | 1  |
| USB Type Mini B (Services):                   | 1  |

**OTHERS**

|  |  |
|--|--|
| Power Supply Voltage:                    | 100-240V +/- 10%, 50/60Hz (AC in)  |
| Power Consumption:                       | Normal: 260W<br>Standby: <0.5W   |
| Operating Temperature:                   | 0~40°C   |
| Carton:                                  | Brown  |
| Net Weight:                              | 2.2kg  |
| Gross Weight:                            | 3.24kg   |
| Dimensions (WxDxH) with Adjustment Foot: | 294x218x110mm  |
| Packing Dimensions:                      | 365x300x188mm  |
| OSD Language:                            | English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, Hindi, Arabic, Vietnamese, Total 22 languages |
| User Guide Language:                     | English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages  |

**STANDARD ACCESSORY**

|                 |               |
|-----------------|---------------|
| Power Cord:     | 1             |
| VGA Cable:      | 1             |
| Remote Control: | 1             |
| QSG:            | Yes           |
| Air Filter:     | Yes (CN Only) |
| Warranty Card:  | Yes (CN Only) |

**OPTIONAL ACCESSORY**

|                     |             |
|---------------------|-------------|
| Lamp/Light Source:  | RLC-109     |
| Air Filter:         | RSPL        |
| Wall/Ceiling Mount: | PJ-WMK-007  |
| Carry Bag:          | PJ-CASE-008 |